



2014 ISRM International Symposium -  
8<sup>th</sup> Asian Rock Mechanics Symposium

# Rock Mechanics for Global Issues - Natural Disasters, Environment and Energy -

Norikazu Shimizu  
Katsuhiko Kaneko  
Jun-ichi Kodama  
Editors



Japanese Committee for Rock Mechanics

Proceedings of the 2014 ISRM International Symposium -  
8<sup>th</sup> Asian Rock Mechanics Symposium, Sapporo, Japan, 14-16 October 2014

# **Rock Mechanics for Global Issues**

## **- Natural Disasters, Environment and Energy -**

*Editors*

Norikazu Shimizu

*Yamaguchi University, Japan*

Katsuhiko Kaneko & Jun-ichi Kodama

*Hokkaido University, Japan*



Japanese Committee for Rock Mechanics

© 2014 Japanese Committee for Rock Mechanics

All right reserved. No part of this publication or the information contained herein may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, by photocopying, recording or otherwise, without written prior permission from the publishers.

Published by: Japanese Committee for Rock Mechanics  
C/O The Japanese Geotechnical Society  
4-38-2, Sengoku, Bunkyo-ku, Tokyo 112-0011, Japan  
<http://www.rocknet-japan.org>

ISBN: 978-4-907430-03-0 (eBook)

# Table of Contents

Preface	XIX
Committees	XX

## *The 2014 ISRM Franklin Lecture*

Drying-induced Deformation Characteristics of Rocks <i>M. Osada</i>	3
--	---

## *Keynote Lectures*

Tunnelling and Underground Construction in China - Challenges and Progress <i>X. Feng, S. Qiu</i>	23
Contributions of Rock Physics to Carbon Dioxide Capture and Sequestration <i>T. Matsuoka, H. Azuma</i>	35
Key Coupled Processes Related to Gas-Fracturing in Unconventional Reservoirs <i>D. Elsworth, Q. Gan, C. Marone, P. Connolly, J. Alpern, B. Culp, K. J. Im</i>	43
Geohazards Risk Management in India <i>S. Parkash</i>	51
Environmental Impact of Nuclear Waste Management Concerns from Intermediate Storage to Final Disposal <i>R. Christiansson</i>	68
Performance Assessment of Rock Cutting Tool <i>S. Jeon</i>	77
A Reinforcement Design Methodology for Highly Stressed Rock Masses <i>E. Villaescusa, J. R. Player, A. G. Thompson</i>	87

## *The 2014 ISRM Rocha Medal Lecture*

Effects of Carbon Dioxide Sequestration on Coal's Hydro-Mechanical Behaviour <i>M. S. A Perera</i>	97
---	----

## *1. Rock Properties*

Creep Behavior of Frozen Shikotsu Welded Tuff <i>Y. Mitsui, S. Hara, K. Akabane, J. Kodama, T. Sugawara, D. Fukuda, Y. Fujii</i>	119
Development of Simple Rock Scratching Cell for Unconfined Compressive Strength Estimation <i>M. N. J. Al-Awad, I. Ali</i>	128
Development of Centrifugal Tensile Test Method to Evaluate Tensile Strength of Softrocks <i>K. Tani, K. Hayano</i>	135
Significant Differences in Effective Stress Coefficient for Rocks within Elastic Region and Peak and Residual Strengths <i>A. B. N. Dassanayake, Y. Fujii, D. Fukuda, J. Kodama</i>	141
Uniaxial Compressive Strength of Shikotsu Welded Tuff and Bibai Sandstone at Sub-zero Temperature <i>S. Hara, J. Kodama, Y. Fujii, D. Fukuda, Y. Mitsui, T. Sugiura</i>	151
Study on the Relation between Unconfined Compressive Strength and Water Absorption of Rock <i>Y. Ito, Y. Kusakabe, K. Okazaki</i>	160
Static and Dynamic Elastic Properties of the Phu Kradung Sandstone at Variation Applied Stress Levels <i>W. Sukplum, L. Wannakao, P. Chanasuek, P. Sonlukjai</i>	168
Comparison of Tensile Strength of Shotcrete and Thin Spray-on Liners (TSLs) <i>H. Yilmaz</i>	177
Assessment of Pore Pressure Effect on Mechanical Properties of Low Porosity Rocks <i>S. Khamrat, K. Fuenkajorn</i>	183

Effects of Loading Rate on Strength and Deformability of Rock Salt under 273-373 Kelvin <i>S. Sartkaew, K. Fuenkajorn</i>	191
Verification of Some Rock Mass Strength Criteria Using Laboratory Test Models <i>S. Thaweeboon, K. Fuenkajorn</i>	198
Variation of Mechanical and Microstructural Characteristics of Marble and Serpentinite under Artificial Dried-wetted-cycling Process <i>P. Shu, C. Chiu, T. Wang, T. Ueng</i>	206
Stress Paths Effects on Multistage Triaxial Test <i>S. Melati, R. K. Wattimena, S. Kramadibrata, G. M. Simangunsong, R. G. Sianturi</i>	216
<b>The Effect of Filled Discontinuity to Shear Strength Parameter of Tuff <i>S. Saptono, B. Wiyono, A. Dewi</i></b>	<b>225</b>
Mechanical Behavior of Rock Joints with Various Kinds of Joint Surface Roughness under Cyclic Direct Shear Loading Conditions <i>S. Maskey, H. Yasuhara, K. Kishida</i>	231
Evolution of En-echelon Flaws to a Fault in Marble under Uniaxial Compression <i>Y. Cheng, L. N. Y. Wong</i>	239
Influence of Scale Effect on Rock Anisotropic Shear Strength <i>A. K. Verma, K. Shadab, R. Kumar</i>	249
Influence of Loading Rate on Fracture Toughness of Rock by Semi-Circular Bend (SCB) Test <i>M. Kataoka, H. Kang, S. Cho, Y. Obara</i>	257
Discussion on Friction Factor of Single Rock Joint under Slide-Hold-Slide Process in Considering Influence of Thermal Conditions <i>N. Tsuda, H. Yasuhara, T. Yano, K. Kishida</i>	263
Effects of Bacterial Ureolysis and Seawater Evaporation on Beachrock Formation <i>T. Danjo, S. Kawasaki, S. Shimazaki, K. Koizuka</i>	270
Improvement in the Unconfined Compressive Strength of Sand Test Pieces Cemented with Calcium Phosphate Compound <i>G. G. N. N. Amarakoon, T. Koreeda, S. Kawasaki</i>	276
Determination of Aperture Characteristics and Hydraulic Conductivity of Fracture Set Using Core Laboratory Tests <i>S. Zhan, Z. Teng, J. Lin, T. Wang, T. Huang</i>	283
Laboratory Assessment of Fracture Permeability under Normal and Shear Stresses <i>D. Phueakphum, K. Fuenkajorn</i>	291
Observation of Mineral Precipitation on Rock Surface <i>A. Nakao, Y. Nara, K. Kashiwaya, T. Ishida, H. Ogawa</i>	303
Correlation between Gas and Water Permeabilities of the Nam Phong Formation Sandstones and their Factors Affecting <i>L. Wannakao, W. Sukplum, W. Yongmee, P. Wannakao, K. Trakoolngam</i>	310
Mechanical and Hydraulic Performance of Sludge-mixed Cement Borehole Plugs in Rock Salt <i>P. Tepnarong, P. Deethouw</i>	319
Mineralogical Characterization of Mudstone Weathering: A Case Study in a Landslide Area, Central Hokkaido, Japan <i>T. Yoneda, K. Hayashi, K. Kashiwaya</i>	328
Evaluation of Principal Stress Directions and Ratio in Underground from P-wave Velocity Measurement in Granite <i>Y. Nara, H. Kato, K. Kaneko, K. Matsuki</i>	336
Muographic Test Measurements For Monitoring Groundwater <i>K. Azuma, H. K. M. Tanaka, H. Suenaga, K. Suzuki</i>	346
Visible and Near Infrared Spectroscopy of Rocks for Rock Strength Evaluation <i>S. Nakashima, Y. Isono, T. Kimura, J. Kanaji, Y. Shukuin, N. Takeda, Y. Yoshida, T. Hamasaki, D. Watanabe, H. Tsutsumi, K. Kawakami, T. Saeki</i>	354
Analysis of Damage in Specimen under Cyclic Uniaxial Loading Test by X-Ray CT Method <i>J. Jung, M. Hamachi, Y. Obara, I. Tanikura, S. Watanabe</i>	365
Statistical Correlation between Thermal Conductivity and Wave Velocities in Rocks <i>Y. Jeong, S. Han, K. Kim, T. Yun</i>	372
Evaluation of Shape Parameters for Rock Fragments by 3D X-ray Computed Tomography and Image Processing <i>H. Suh, S. Han, T. Yun, K. Kim</i>	379
Experimental Introduction of Quantitative Indexes in Drill Core Observation -- Classifying the Strata and the Degree of Weathering by Measuring Core Sample Magnetic Susceptibility and Color -- <i>H. Kikuyama, S. Ota</i>	385
AE Characteristics of Fractured Rocks in Creep Shear <i>Y. Wang, J. Wang, J. Tang, T. Hu</i>	394

## The Effect of Filled Discontinuity to Shear Strength Parameter of Tuff

Singgih SAPTONO<sup>a</sup>, Bagus WIYONO<sup>a</sup>, Amelia DEWI<sup>a</sup>

<sup>a</sup> Department of Mining Engineering, Faculty of Mineral Technology  
 Pembangunan Nasional Veteran Yogyakarta University, Yogyakarta 55283, Indonesia  
[singgihsaptono@upnyk.ac.id](mailto:singgihsaptono@upnyk.ac.id)

### Abstract

The influence of infilling material on rock samples often becomes a problem in determining the shear strength. In fact, discontinuity such as joint is often encountered in rock mass. The presence of discontinuity will change the behavior of rock mass. This phenomena become worst when the joint filled by infilling material. There many problems in the design and construction due to the presence of filled joint rock. Concerning with the signification the effect of filled joint to its shear strength it is necessary to carry out tests on rock samples. A series of laboratory experimentation is carried out to model the filled joint by using Tuff as a joint block and clay infilling material. In these tests is varying parameters of normal stress, infilling thickness and roughness of joint surface. From the test it is showed that the shear strength of a joint decreased significantly with the presence of infilling material in the aperture of a joint. The effect of asperities has influence 25–50% in shear strength of the thickness of the asperities. In tropical country as Indonesia, it is evident that asperities influence of Tuff on the shear strength in tropical country higher than non tropical country, the reduction of shear strength depends on the thickness of infilling material are cohesion of sample filled 0.25 cm of thickness and sample filled 0.5 cm of thickness decrease 73.63% and 86.91% of natural sample condition.

**Keywords:** Sediment rock, Tuff, Discontinuity, Infilling material, Shear strength

### 1. Introduction

In Indonesia, environmental changes such as cyclical drying and wetting conditions and swelling have been believed to lead to deterioration of the mechanical properties of the rock mining. As an effect of very high rainfall rate in Indonesia, rock changing such as the weathering process occurs very often.

The sliding surface in a slope may consist of a single plane continuous over the full area of the surface, or a complex surface made up of both discontinuities and fractures through intact rock. Determination of reliable shear strength values is a critical part of slope design because, as will be shown in later chapters, small changes in shear strength can result in significant changes in the safe height or angle of a slope. The choice of appropriate shear strength values depends not only on the availability of test data, but also on a careful interpretation of these data in light of the behavior of the rock mass that makes up the full-scale slope (Hoek & Bray, 1981).

Generally, rock sample that is tested in laboratory is small and massive. Otherwise, rock sample even it is taken from same formation can have different shear strength because of the discontinuity and heterogeneous characteristic (Saptono, 2012). The existence of the discontinuity especially joints will change the rock behavior. Based on its nature, joint with weaker infilling is known to exhibit lower strength and higher deformability (Amin et al., 2008). Filled joint also usually initiate the unstable condition of slope design.

### 2. Geological Setting

The rock sample is taken from Semilir Formation and Nglanggeran Formation on Pleret District (Figure 1) is Tuff. Tertiary volcanic rocks in the Southern Mts., located between Sub District of Piyungan and Parangtritis, Bantul - Yogyakarta, are called Semilir Formation and Nglanggeran Formation; both stratigraphically are interfingering. Semilir Formation characteristically comprises of pumice breccias and tuffs, whereas Nglanggeran Formation is predominantly composed of andesitic

breccias and lavas. Sindet Formation mainly consists of pumice breccias and tuffs, but also co-ignimbrite breccias. The co-ignimbrite breccias are typically comprised of andesitic blocks having 3-5 m in diameter together with pumice that set in tuff matrix. The lower boundary of the Sindet Formation is probably alternating epiclastic material of sandstones and mudstones which is partly calcareous. The upper part of this formation is concordantly overlain with Wonolelo Formation; it is well exposed at Pucung village, Wukirsari-Imogiri. Wonolelo Formation is widely distributed from Piyungan to the south and southwest until Parangtritis areas. Divisions reflect clearly the geovolcanic history in the area, starting from construction periods of composite volcano (es) to the destruction phases of caldera formation (Mulyaningsih, 2006; Bronto, 2010).

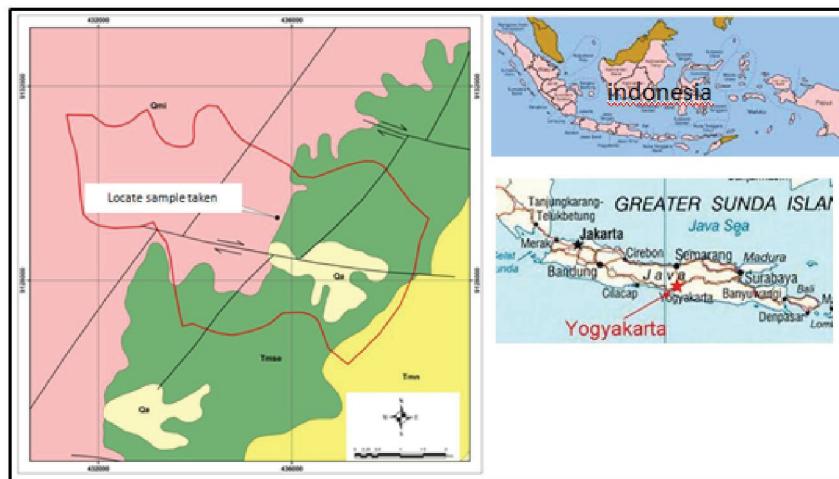


Fig.1. Location of taken the sample from Pleret District, Bantul Region, Yogyakarta

### 3. Previous Study

The clean discontinuity surface with rock to rock contact and no infilling, in which the shear strength is derived solely from friction angle of the rock material. However, if the discontinuity contains an infilling, the shear strength properties of the fracture are often modified, with both the cohesion and friction angle of the surface being influenced by the thickness and properties of the infilling. For example, for a clay-filled fault zone in igneous rock, it would be assumed that the shear strength of the discontinuity would be that of the clay and not the igneous rock.

In the case of calcite filled fracture, a high cohesion would be used in design, but only if it were certain that the discontinuity would remain healed after any disturbance caused by blasting or digging process when excavating the slope. The presence of infillings along discontinuity surfaces can have a significant effect on stability. It is important that infillings be identified in the investigation program, and that appropriate strength parameters be used in design.

The effect of the infilling on shear strength will depend on both the thickness and strength properties of the infilling material. With respect to the thickness, if it is more than about 25–50% of the amplitude of the asperities, there will be little or no rock-to-rock contact, and the shear strength properties of the fracture will be the properties of the infilling (Goodman, 1970). For example montmorillonite and bentonitic clays, and clays associated with coal measures have friction angles ranging from about 8 to 20° and cohesion values ranging from 0 to about 200 kPa. Some cohesion values were measured as high as 380 kPa, which would probably be associated with very stiff clays.

All natural discontinuity surfaces exhibit some degree of roughness, varying from polished and slicksided sheared surfaces with very low roughness, to rough and irregular tension joints with considerable roughness. These surface irregularities are given the general term asperities, and because they can have a significant effect on the stability of a slope. The effect of surface roughness in shear strength has proposed by Patton. Patton proposed that asperities can be divided into two classes: first- and second-order asperities. The first-order asperities are those that correspond to the major undulation on the bedding surfaces, while the second-order asperities are small bumps and ripples on the surface and have higher values. Because of that theory, to get true internal friction angle, friction angle that we got from laboratory test should be diminished with first- or second-order.

#### 4. Experiments

First test is carried out thin section test to identification of the name rock sample. Rock sample is identified with thin section on petrology analysis as Vitric Tuff included with glass 85%, quartz 7%, lithic 3% and K-Feldspar 5% (Figure 2) and infilling material is clay with Bioclastik 5%, calcite 20%, Micrite 68%, sparit 3%, opaq mineral 2% and Galukonit 2% (Figure 3).

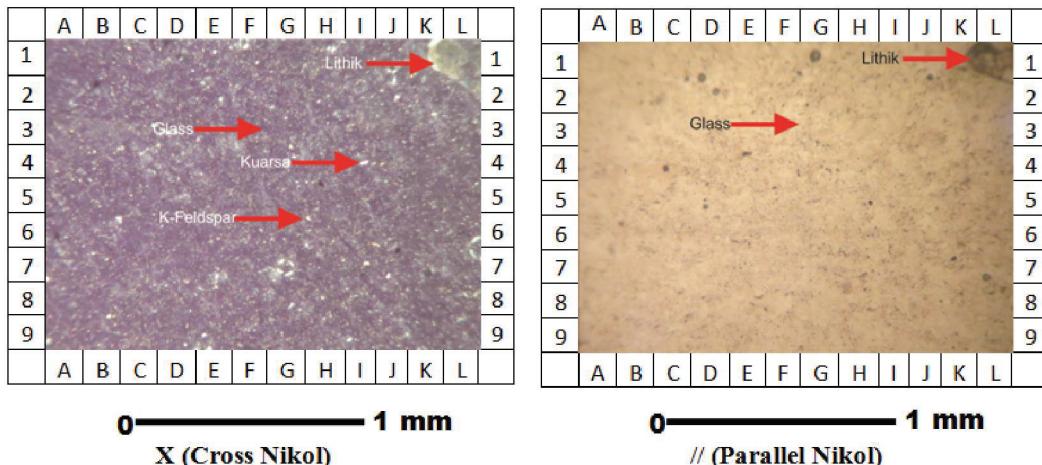


Fig. 2. Tuff thin section analysis

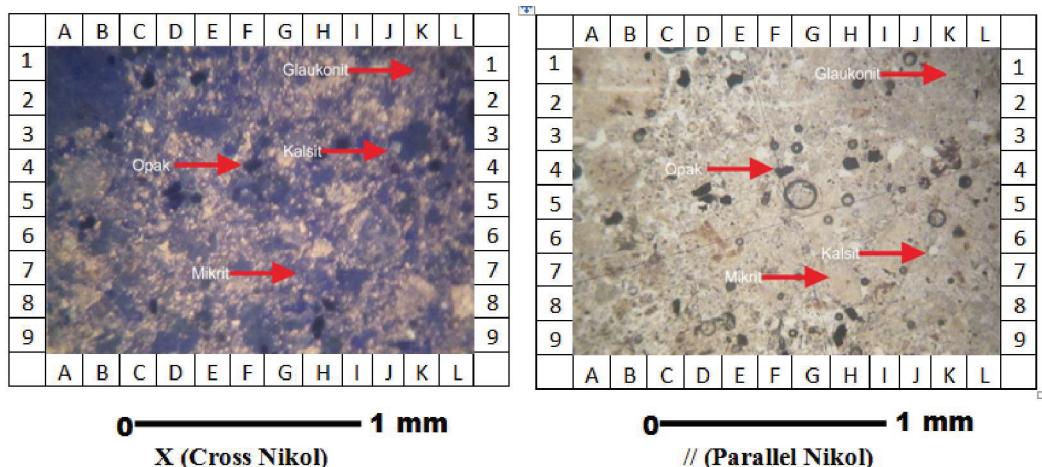


Fig. 3. Thin section analysis as clay as infilling material

Second test is carried out mechanical properties included unconfined compressive stress test and direct shear test. Unconfined compressive stress test carried out to know classification based on compressive strength. Direct shear test obtained the values of cohesion and friction angle of the rock, whose results will be compared to the thickness parameter infilling material.

#### 5. Discussion

Unconfined Compressive Strength test we know that Tuff is soft rock based on ISRM 1979 because its UCS is 5.52 MPa. The UCS is used as reference to know the limit of normal stress in shear strength test. Ladanyi & Archambault (1972) said that normal stress can't be more than 15% of UCS, and less than 20% (Graselli, 2001). In the other hand of tropical country as Indonesia, 12,5% is the limit for normal stress that can be applied in shear strength test of rocks (Singgih, 2012). That means that normal stress that is applied should be less than 0,69 MPa.

Shear strength test is carried out in two conditions. First condition is sample without infilling material and second condition is sample with infilling material thickness 0.25 mm and 0.5 mm. To know shear surface of sample is digitized by digitization tool as shown in Figure 4. The measurement of second-order angle for natural sample (clean discontinuity surface and without infilling materials) is 17.3° (Figure 4).

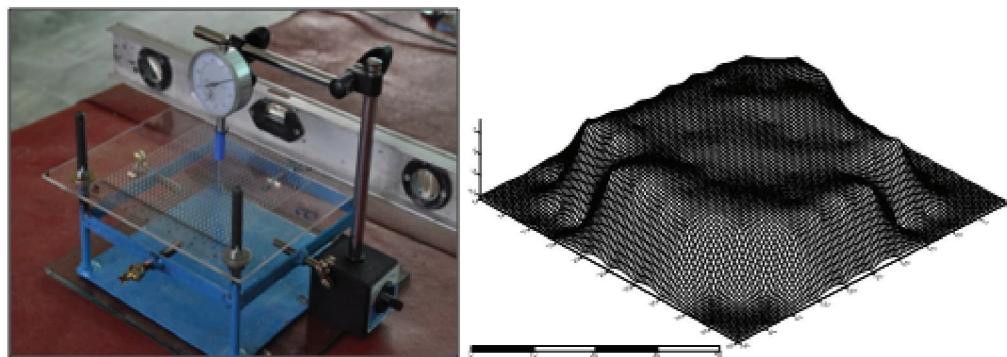


Fig. 4. Digitization Tool and 3D surface

The result of the shear strength tests is presented in Table 1 and Fig 5.

Table 1 Shear Strength Test Parameters

Condition	Parameters	
	Cohesion (c), kPa	Friction Angle ( $\phi$ )
Natural	86.06	27.34°
0.25 cm infillings	18.74	5.77°
0.5 cm infillings	9.30	5.83°

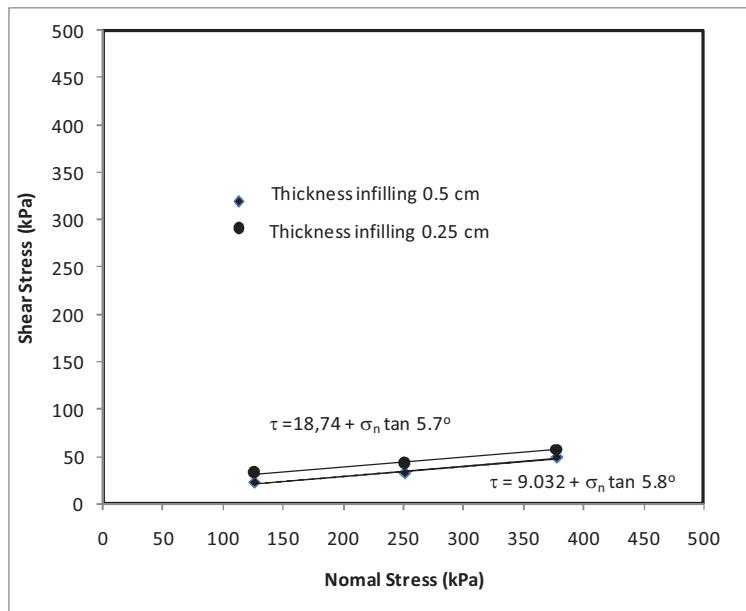


Fig.5. Cohesion and friction angle of Tuff with infilling material thickness of 0.25 cm and 0.5 cm respectively

From Table 1 can be seen that friction angle of sample in natural condition has friction angle higher than sample with infilling material. Even, the friction angle of sample with natural condition corrected with second-order angle it is still higher than in filling condition. Friction angle of sample filled 0.25 cm decreases 42.53% than friction angle of Tuff. In the other hand, 41.93% is the decreasing of sample filled 0.5 cm than natural condition. This phenomenon shows that the presence of infilling material will decrease the shear strength of discontinuity

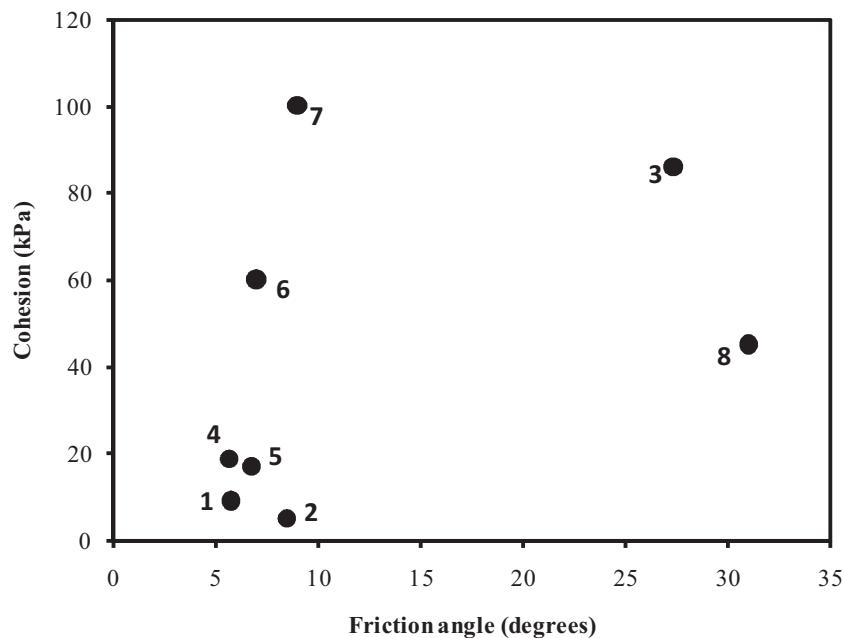


Fig.6. Shear strength of the filled discontinuities (Modified from Hoek & Bray, 1981)

Figure 6 shows that different friction angle, cohesion decrease sufficiently. The thicker infilling material has the smaller cohesion. It is shown that cohesion of sample filled 0.25 cm of thickness and sample filled 0.5 cm of thickness decrease 73.63% and 86.91% from natural condition. Sample filled 0.25 cm thickness has bigger cohesion than sample 0.5 cm thickness because there is some contact that occurred in asperities due to the smaller thickness.

The shear strength of natural discontinuities as being made up three components which are a basic frictional component, a geometrical component controlled by surface roughness (JRC) and an asperity failure component controlled by the ratio ( $JCS/\sigma_n$ ). JRC is taken from cross section of model digitization and JCS is the result of UCS of infilling material. Based on Barton criteria, infilling material affect cohesion and friction angle of sample filled 0.25 cm of thickness 75.38% and 2.85 % lower than natural sample condition, sample filled 0.5 cm of thickness has 90.56% and 25.71% lower cohesion and friction angle than natural condition.

## 6. Conclusion

The infilling material affects cohesion as much as 86.91% and 90.56% compared to natural sample condition of Tuff. In the other hand, the friction angle sample with infilling material is decreasing up to 42.93% and 25.71% the friction angle of Tuff.

## Acknowledgements

The authors would like to thanks to the head of Department of Mining Engineering Faculty of Mineral Technology Pembangunan Nasional Veteran University which continues to support the research of rock characterization and would you like to thank the students, laboratory staff and technicians involved in this research.

## References

- Amin, M., Yau, O.N., Huei, C.S., and Abdullah, R.A., 2008, Characteristic of Filled Joint Under Shear Loading, *Geology Society of Malaysia Bulletin*, Vol. 54.  
 Barton, N., 1974, A Review of Shear Strength of Filled Discontinuities in Rock, *Norwegian*

- Geotechnical Institute Publication, Oslo.
- Barton, N., 1976, The Shear Strength of Rock and Rock Joints, International Journal of Rock Mechanics and Mining Service, Vol. 13, 255-279.
- Barton, N.R. and Bandis, S.C., 1990, Review of Predictive capabilities of JRC-JCS Model in Engineering Practice In Rock Joints, Proc. Int. Sympoium on Rock Joints, Rotterdam.
- Brace, Paulding, Scholz, 1966, Dilatancy in The Fracture of Crystalline Rocks, Journal of Geophysical Research, America.
- Bronto, S., 2010, Geologi Gunung Api Purba, Publikasi Khusus Badan Geologi – Kementerian Energi dan Sumber Daya Mineral, 154.
- Brown, E.T., 1981, Rock Characterization Testing and Monitoring: ISRM Suggested Methods, Pergamon Press, England.
- Grasselli, G., 2001, Shear Strength of Rock Joints Based on Quantified Surface Description, Thesis, Italy.
- Griffith, A.A., 1925, The Phenomena of Rupture And Flow in Solids, Vol. 221, Royal Society, London.
- Hoek, E and Bray, J.W., 1981, Rock Slope Engineering, Spon Press, London.
- Hoek, E., 1983, Strength of Jointed Rock Masses, Geotechnique, No.3, Vol.23, pp.187-223.
- Ladanyi, B., and Archambault, G., 1972, Simulation of Shear Behaviour of a Jointed Rock Mass, Proc. 11th Symposium Rock Mechanic, New York.
- Mulyaningsih, S., 2006, Geologi Lingkungan di Daerah Lereng Selatan Gunungapi Merapi, Yogyakarta, pada Waktu Sejarah (Historical Time), Disertasi, Institut Teknologi Bandung.
- Patton, F.D., 1966, Multiple Modes of Shear Failure in Rock, Proc. 1<sup>st</sup> Cong. ISRM, Lisbon.
- Saptono, S., 2012, Pengembangan Metode Analisis Stabilitas Lereng Berdasarkan Karakterisasi Batuan di Tambang Terbuka Batubara. Disertasi Doktor, Rekayasa Pertambangan, Institut Teknologi Bandung.
- Wille, D.C., and Mah, C.W., 2004, Rock Slope Engineering Civil and Mining, 4<sup>th</sup> Edition, Spon Press Taylor & Francis Group, London, pp. 74-108.