

Vol 18, No 1 (2021) x SISTER | Layanan_bkd x +

Not secure | jurnal.upnyk.ac.id/index.php/eksergi/issue/view/517

Apps Nakula GCR SPADA WhatsApp Blank Quiz - Google... CBIS FTI

P-ISSN: 1410-394X, E-ISSN: 2460-8203

EKSERGI

Jurnal Prodi Teknik Kimia UPN "Veteran" Yogyakarta

INDEXED IN DOAJ IPI doi Member of Crossref Google Scholar

sinta 4 Terakreditasi

HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES ANNOUNCEMENTS AIM AND SCOPE EDITORIAL BOARD AUTHOR GUIDELINES

Home > Archives > Vol 18, No 1 (2021)

Vol 18, No 1 (2021)

Vol 18, No. 1 (2021)

DOI: <https://doi.org/10.31315/e.v00>

OPEN JOURNAL SYSTEMS

USER

Username

Password

Remember me

ie Web Store - Extensio x (62) WhatsApp x SISTER | Tridharma x SISTER | Tridharma x Vol 18, No 1 (2021)

Not secure | jurnal.upnyk.ac.id/index.php/eksergi/issue/view/517















Nakula GCR SPADA WhatsApp Blank Quiz - Google... CBIS FTI

Vol 18, No 1 (2021)

Vol 18, No. 1 (2021)

DOI: <https://doi.org/10.31315/e.v00>

Table of Contents

<p>Optimasi Dosis Koagulan Untuk Pengolahan Air Sungai Suko</p> <p> <i>syarifah aini</i></p>	1-6 
<p>Pretreatment Spirulina platensis Residue untuk Produksi Bioetanol</p> <p> <i>Heni Anggorowati, Indriana Lestari, Arief Budiman, Yano Surya Pradana</i></p>	7-12 
<p>Production of briquettes from Indonesia agricultural biomass waste by using pyrolysis process and comparing the characteristics</p> <p> <i>Sri Wahyu Murni, Tutik Muji Setyoningrum, Muhamad Maulana Azimatur Nur</i></p>	13-17 
<p>INVENTARISASI EMISI GAS RUMAH KACA SEKTOR LIMBAH DENGAN FIRST ORDER DECAY DI KABUPATEN KARANGASEM</p> <p> <i>Affan Irfan Fauziawan</i></p>	18-23 
<p>Efek Pretreatment Ultrasonikasi Terhadap Hidrolisis Enzimatis Spirulina platensis Residue</p> <p> <i>Indriana Lestari, Heni Anggorowati, Faizah Hadi</i></p>	24-28 
<p>Effect of particle sizes and sodium hydroxide concentrations on silica extraction from minerals obtained in Kalirejo village, Kokap, Kulonprogo, Yogyakarta</p> <p> <i>Tutik Muji Setyoningrum, Wibiana Wulan Nandari, Sri Wahyu Murni, Muhamad Maulana Azimatur Nur</i></p>	29-31 
<p>Perancangan Model Filter Air Dengan Serbuk Keramik Sebagai Media Filter</p> <p> <i>Hari Wahyudi</i></p>	32-36 

EDITORIAL TEAM

The screenshot shows the 'Editorial Team' page of the journal 'Jurnal Prodi Teknik Kimia UPN "Veteran" Yogyakarta'. The page features a navigation menu with options like HOME, ABOUT, LOGIN, REGISTER, SEARCH, CURRENT, ARCHIVES, ANNOUNCEMENTS, AIM AND SCOPE, EDITORIAL BOARD, and AUTHOR GUIDELINES. The main content area is divided into sections: 'Editor in Chief' (Dr. Muhamad Maulana Azimatun Nur, ST., MT, Indonesia), 'Managing Editor' (Marcellinus Christwardhana, Ph.D., Teknik Kimia Institut Teknologi Indonesia), and 'Editorial Board' (listing several members with their affiliations). A 'Member of Editor' section is also present. On the right side, there is a sidebar with a login form (USER) and a 'JOURNAL CONTENT' section with search and browse options.

Reviewer

The screenshot shows the 'List of Possible Reviewers' page. It lists several potential reviewers with their names and affiliations, including Prof. Irini Angelidaki (Denmark), Prof. Dr. G.J.W. Euverink (Netherlands), Prof. Dr. Ir. H.J. Heeres (Netherlands), Prof. Nakajima Mitsuho (Japan), Assoc. Prof. Edi Hariyanto (Malaysia), Dr. E.J. Stamhuis (Netherlands), Dr. Ambati Ranga Rao (India), Dr. Peter Boelen (Netherlands), Dr. Yulius Deddy Hermawan (Indonesia), Ir. Mahreni Mahreni (Indonesia), Dr. Ir. Siti Jamilatun (Indonesia), Dr. Heri Herianto (Indonesia), Dr. Avido Yuliestyan (Indonesia), Dr. Iqbal Syaichurrozi (Indonesia), and Dr. Putri Restu Dewati (Indonesia). On the right side, there is a sidebar with a list of journal-related links (PEER REVIEW PROCESS, OPEN ACCESS STATEMENT, PUBLICATION ETHICS, AUTHOR GUIDELINES, PLAGIARISM SCREENING, ARTICLE PROCESSING CHARGES, COPYRIGHT NOTICE, ADVERTISING POLICY, INFORMED CONSENT POLICY, RETRACTION HANDLING, INDEXING, TEMPLATE) and a login form (USER).

Effect of sodium hydroxide concentrations and particle sizes on silica extraction from mineral rock obtained in Kalirejo village, Kokap, Kulonprogo, Yogyakarta

Tutik Muji Setyoningrum*, Sri Wahyu Murni, Wibiana Wulan Nandari, Muhamad Maulana Azimatun Nur

*Chemical Engineering Department, Faculty of Industrial Engineering, UPN "Veteran" Yogyakarta
Jl. SWK 104 Condongcatur, Sleman, Yogyakarta*

Artikel histori :

Diterima 08 Maret 2021
Diterima dalam revisi 25 April 2021
Diterima 05 Mei 2021
Online 07 Mei 2021

ABSTRACT: Silica is mainly used in the production of rubber, glass, cement, ceramics, paper, cosmetics, electronics, paintings, healthcare and other industries. Kalirejo village has a potential abundant resource of silica minerals. However, to refine the silica, a high cost of extraction should be done to obtain high purity. Different refining methods influence the quality of silica. The purpose of this research was to study the refining process of silica obtained from Kalirejo village, Kokap, Kulonprogo by applying simple and cheap solid-liquid extraction. The extraction was done by varying the particle size of the rock at 100 - 200 mesh, while NaOH concentration was varied at 0.5 N to 5 N. Results showed that the mineral taken from Kalirejo village was dominated by silica (23% m/m). The largest extract (4.89 gram) was obtained at 200 mesh and using NaOH 5 N with yield of 15.07% m/m. Higher NaOH and higher particle size enhanced the extraction yield. This finding could help small communities in Kalirejo village to enhance the quality of silica by employing simple and cheap extraction process.

Keywords: extraction, silica, particle size, NaOH

1. Introduction

Silica is a chemical compound with the molecular formula SiO_2 (silicon dioxides) which can be obtained from mineral, vegetable and crystal synthesis. Besides forming naturally, silica with a tridymite crystal structure can be obtained by heating silica at a temperature of 870°C , while silica with a cristobalite structure can be obtained when the heating process is carried out at 1470°C (Fernandes et al., 2017).

Several methods can be used to obtain a high grade of silica. Extraction is the most common method to enhance the purity of silica (Chun and Lee, 2020). The basic principle of extraction is by dissolving polar compounds in polar solvents and non-polar compounds in non-polar solvents. Extraction process conditions as temperature, solvent solution concentration, extraction time, and stirring are factors that greatly influence the extraction process. However, to be implemented in a small business scale, a cheap extraction process should be carried out to make it more feasible.

According to previous researcher, silica rock can be simply extracted by using NaOH to create a solution of sodium silicate (Ishmah, et al., 2020). The solution is mixed with HCl to precipitate sodium silicate. However, previous research has not included particle size of the mineral in the extraction process. Moreover, previous study reported that Kokap village, Kulonprogo, Yogyakarta, is a potential zone that contains minerals, mostly consist of silica (Rais et al., 2020). However, most of the community could not obtain a

high grade of silica from the rocks due to lacking of the knowledge. We assume that by using a cheap and simple process by combining NaOH and particle size of the mineral, higher purity of silica can be obtained. The aim of this research was to investigate the effect of sodium hydroxide and particle sizes of mineral rock on the extraction of minerals obtained in Kalirejo Village to obtain high purity of silica. This is the first report that demonstrated the potency of minerals rock collected from Kokap village to produce silica by using simple and cheap extraction process.

2. Materials and Methods

2.1. Material Preparation

The material used in this study was obtained from Kalirejo, Kokap, Kulonprogo Village, Yogyakarta. The mineral rock was washed twice using distilled water, then it was dried overnight, The dried rock was broken down and crushed using a crusher, then sieved using a screening with a size of 80 up to 200 mesh. The prepared sample was then characterized by X-ray Diffraction (XRD). The main chemicals used in this experiment were HCl (pro analysis, Sigma Aldrich), and NaOH (pro analysis, Sigma Aldrich).

2.2. Extraction

The extraction was performed in a 1 L stirred three-neck reactor. Fifty gram of the sample with different particle sizes (100-200 mesh) was extracted with NaOH solution (100

* Corresponding Author: (0274) 486733
Email: tutikmuji@upnyk.ac.id

mL) at different concentrations (0.5 - 5 N), then heated at 100 – 105 °C for 60 min, and stirred at 300 rpm. The extract was then cooled and filtered using filter paper (Whatman 40) at the end of the process.

2.3. Silica formation and drying stage

The filtrate was precipitated by using HCl (2N) until pH lower than 7 to obtain sodium silicate. The precipitates was filtered using filter paper (Whatman 40) and dried at 100 oC for 4 hours. The silica formed was then weighed until a constant weight obtained.

2.4. Analysis

The conversion of the sample was calculated using Eq. 1.

$$\text{yield} = \frac{\text{weight of silica}}{\text{weight of sample}} \times 100\% \quad \text{Eq. 1}$$

To ensure the silica content in the product, the dried precipitate was analyzed using XRD analysis from the highest yield

3. Result and Discussion

3.1. Raw Material Analysis

The sample taken from Kalirejo, Kokap, Kulonprogo was analysed using X-RD at the National Nuclear Energy Agency, Yogyakarta. The result of the element was shown in **Table 1**. Figure 1 showed XRD spectra. The result was then identified using crystallography open database. It is found that the silica was found in the form of (SiO₂)_n.

From the analysis, the sample was dominated by silicate with value 23.37%, followed by aluminium, and sulfur. Compared to other mineral sites, the mineral rock from Kalirejo village is almost equal compared to previous research that reported silica content from Bali and Lombok were 19 and 21 %, respectively (Ishmah et al., 2020).

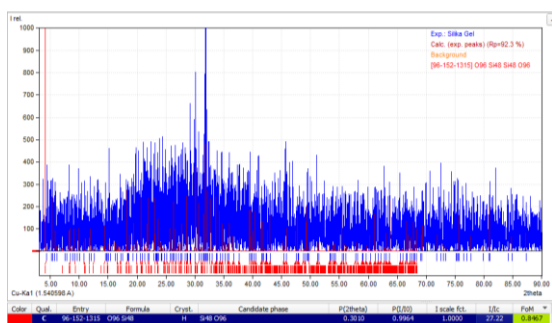


Figure 1. XRD result from mineral rocks collected from Kokap village

3.2. Effect of NaOH and particle size

Figure 2 shows the relationship between the variation in NaOH concentration and the weight of silica at particle sizes of 80 mesh, 100 mesh, 150 mesh and 200 mesh. The highest silica gel obtained was found in 150 and 200 mesh, with the addition of 5 N NaOH. The addition of NaOH from 4 to 5 N

in 150 and 200 mesh drastically enhanced the silica gel production.

Figure 3 showed that the largest silica yield can be taken at 200 mesh size with 5 N NaOH. The amount of silica taken was 4.89 grams in the form of silica gel (H₂SiO₃), and in the form of Si of 1.75 grams, where the initial silica content in mineral was 11.68 grams.


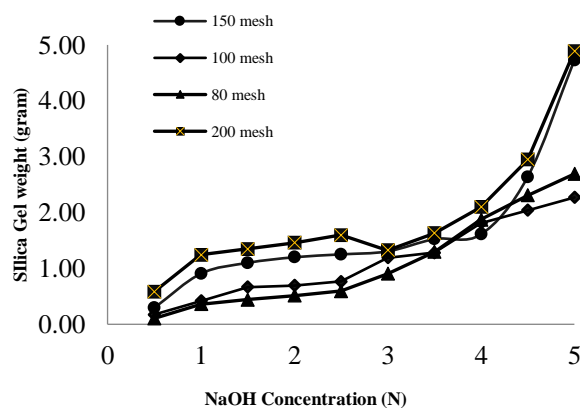


Figure 2. Interaction effect of silica gel weight and the concentration of NaOH

In this experiment, it is found that the increasing of NaOH concentration increased the yield and the weight of silica produced at the same particle size. This is due to the higher NaOH could dissolve more silica contained in the sample. Previous study reported that the increasing NaOH concentration up to 3 N could increase the silica extracted from pumice (Sempana et al., 2018). Moreover, Zuwwana et al. (2021) found that the extraction of silica from rice husk was optimum at 3 N NaOH. NaOH is the most common solvent to extract silica into form of sodium silicate as mentioned earlier (Chun and Lee., 2020).



Sodium silicate was then precipitated using acid.

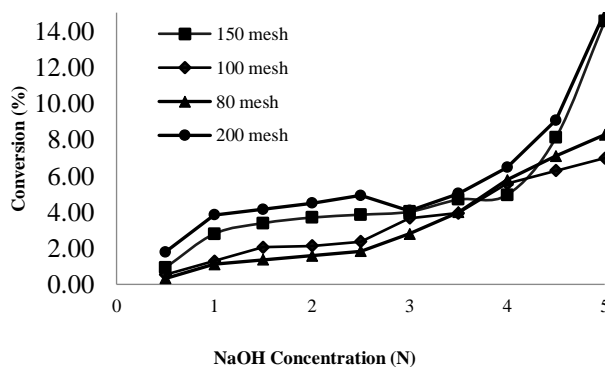


Figure 3. Effect of NaOH concentration on silica conversion

Different mineral particle sizes (80 mesh, 100 mesh, 150 mesh, and 200 mesh) also influenced the yield and the weight of silica. This is due to the particle size that influence the surface area of the material, thus, increasing the extraction time. Chun and Lee (2020) reported that the effect of particle size influenced the concentration of silica extracted from rice husk ash. Previous research also demonstrated that NaOH could interact very stable with the higher surface area of silica (Rimsza et al., 2018). However, in this research, the yield was still small. It is necessary to study the normality of greater NaOH and the quality of pure NaOH analysis and the particle size can be varied more finely and the extraction temperature can be enlarged. Previous study reported that pure silica could be extracted from rice husks ash when high temperature 650 °C was used in the extraction process (Ilochonwu et al., 2015).

Table 1. Elemental content in the mineral sample obtained from Kokap village

Element	Composition
Si	23.37 %
Al	3.09 %
S	2.79 %
Cl	0.14 %
K	2.92 %
Ca	1.12 %
Ti	0.38 %
Fe	7.26 %
As	0.29 %
Mn	0.042 %
Cu	0.003 %
Zn	0.028 %
Ga	0.002 %
Rb	0.014 %
Sr	0.0149 %
Y	0.0143 %
Sr	0.0107 %

4. Conclusion

This research demonstrated facile silica extraction of mineral rock obtained from Kokap, Kulonprogo. Higher NaOH concentration and lower particle size resulted higher silica yield. The highest extracted silica yield in this experiment was 4.89 gr at a concentration of 5 N NaOH and 200 mesh. By employing this method, the small community in the village could utilize the mineral rocks to produce sodium silicate.

5. Acknowledgment

This research was funded by LPPM UPN “Veteran” Yogyakarta 2020 with reference number B/105/UN.62/PT/VII/2020.

References

- Chun J., and Lee, J.H., 2020, Recent Progress on the Development of Engineered Silica Particles Derived from Rice Husk. *Sustainability*. 12. 1-19.
- Fernandes, I.K., Sanchez, F.A.L., Jurado, J.R., Kieling, A.G., Rocha, T.L.A.C., Moraes, C.A.M., Sousa, V.C., 2017, Physical, chemical and electric characterization of thermally treated rice husk ash and its potential application as ceramic raw material. *Adv. Powder. Technol.* 28 (4). 1228-1236.
- Ilochonwu, C.E., Nwajagu, C.O., Onyenanu, I.U., Nwonye, E.I., 2015, Effect of Temperature in Extraction of High Purity Amorphous Silica from Rice Husk for Silicon Production. *EDP Congress*. 219-227.
- Ishmah, S.N., Permana, M.D., Firdaus, M.L., 2020, Extraction of silica from Bengkulu beach sand using alkali fusion method. *Journal of Science Education*, 4(2). 1-5
- Rais, D.A., Muhammad, A., Panggabean, C.M., Ningsih, D.W., Khumayroh, R., 2020, Identifikasi struktur bawah permukaan sebagai pengontrol sebaran mineralisasi di dusun plampang dan sangon, desa kalirejo, kecamatan kokap, kabupaten kulonprogo, daerah istimewa yogyakarta. *Jurnal geocelebes*. 4 (2). 93-101
- Rimsza, J.M., Jones R.E., Criscenti, L.J., 2018, Interaction of NaOH solutions with silica surfaces. *J. colloid interface sci.* 516. 128-137.
- Sempana, E., Marurung, P., Riyanto, A., 2018, Pengaruh Konsentrasi NaOH Pada Ekstrak Nanosilika Berbasis Batu Apung. *Jurnal teori dan aplikasi fisika*. 6 (2).
- Zuwwana, I., Riza, M., Aprilia, S., 2021, The impact of solvent concentration on the characteristic of silica from rice husk ash using sol gel method. *IOP conf. Ser. Materials science and engineering*. 1087