



# 10th Anniversary of Science Publishing Group

Username  Login

Password  Register

- Home
- Journals
- Special Issues
- Books
- Submission
- Services
- Contact Us
- 10th Anniversary

Article Title

## Petroleum Science and Engineering

- Home
- Archive
- Special Issues
- Indexing
- Editorial Board
- Reviewers
- Submission Guidelines
- Article Processing Charges
- Publication Ethics
- Copyright
- FAQ

### Archive

- 2022, Volume 6
  - Vol. 6, Issue 2, Dec.
  - Vol. 6, Issue 1, Jun.
- 2021, Volume 5
- 2020, Volume 4
- 2019, Volume 3
- 2018, Volume 2
- 2017, Volume 1

Submit a Manuscript

### Special Issues

- Propose a Special Issue
- Special Issue Guidelines

Join Editorial Board

Become a Reviewer

Home / Journals / Earth, Energy & Environment / Petroleum Science and Engineering / Archive

### Archive Volume 6, Issue 2, December 2022

OPEN ACCESS

**Effect of 1-Butyl-3-Methylimidazolium Hexafluorophosphate [BMImPF<sub>6</sub>] on the Precipitation of Insoluble Organic Solid Residues from Organic Solvents**

Victoria Bennett, Daniel Ikoromo Ziriki

Pages: 47-50 Published Online: Jul. 29, 2022

DOI: [10.11648/j.pse.20220602.11](https://doi.org/10.11648/j.pse.20220602.11) Views **56** Downloads **25**

Abstract

PDF

OPEN ACCESS

**Monitoring the Water Content in Crude Oil and Determining Its Causes and Methods of Treatment**

Abbas Kadhim Ayyed

Pages: 51-58 Published Online: Aug. 31, 2022

DOI: [10.11648/j.pse.20220602.12](https://doi.org/10.11648/j.pse.20220602.12) Views **44** Downloads **38**

Abstract

PDF

OPEN ACCESS

**The Effects Between Interfacial Tension and Viscosity Reduction in Viscous Crude Oil Through the Addition of Surfactant Sodium Lignosulfonate (SLS) for EOR Purpose**

Harry Budiharjo Sulistyarno, Joko Pamungkas, Yulius Deddy Hermawan

Pages: 59-64 Published Online: Nov. 23, 2022

DOI: [10.11648/j.pse.20220602.13](https://doi.org/10.11648/j.pse.20220602.13) Views **10** Downloads **3**

Abstract

PDF

<p><b>PUBLICATION SERVICES</b></p> <ul style="list-style-type: none"> <li>Journals</li> <li>Special Issues</li> <li>Conferences</li> <li>Books</li> <li>Copyright</li> </ul>	<p><b>JOIN US</b></p> <ul style="list-style-type: none"> <li>Join as an Editor-in-Chief</li> <li>Join as an Editorial Member</li> <li>Become a Reviewer</li> <li>Qualification &amp; Requirement</li> <li>Benefits &amp; Responsibilities</li> </ul>	<p><b>RESOURCES</b></p> <ul style="list-style-type: none"> <li>Open Access</li> <li>For Authors</li> <li>For Librarians</li> <li>For Booksellers</li> <li>Article Processing Charges</li> </ul>	<p><b>SPECIAL SERVICES</b></p> <ul style="list-style-type: none"> <li>Download Certificates</li> <li>Recommend to Library</li> <li>Ordering from SciencePG</li> <li>Subscribe</li> </ul>	<p><b>ADDRESS</b></p> <p>Science Publishing Group 1 Rockefeller Plaza, 10th and 11th Floors, New York, NY 10020 U.S.A. Tel: (001)347-983-5186</p>
--	--	---	--	---

FOLLOW SciencePG

[Sitemap](#) | [Terms & Conditions](#) | [Privacy Policy](#) | [Feedback](#) | [Services](#) | [Contact Us](#)  
 Copyright © 2012 -- 2022 Science Publishing Group – All rights reserved. Use of this Web site signifies your agreement to the terms and conditions.



# 10th Anniversary of Science Publishing Group





[Home](#)
[Journals](#)
[Special Issues](#)
[Books](#)
[Submission](#)
[Services](#)
[Contact Us](#)
[10th Anniversary](#)



## Petroleum Science and Engineering

[Home](#) | [Archive](#) | [Special Issues](#) | [Indexing](#) | [Editorial Board](#) | [Reviewers](#) | [Submission Guidelines](#) | [Article Processing Charges](#) | [Publication Ethics](#) | [Copyright](#) | [FAQ](#)

Home / Journals / Earth, Energy & Environment / Petroleum Science and Engineering / Editorial Board

### Editorial Board

#### Hasan Al-Saedi

Department of Petroleum Engineering, Missouri University of Science and Technology, Rolla, United States

#### Draco Iyi

School of Energy, Construction and Environment, Faculty Research Centre in Fluid and Complex Systems, Coventry University, Coventry, United Kingdom

#### Ming Wu

College of Life Science and Technology, Jinan University, Guangzhou, China

#### Yalong Li

Nanjing University of Science and Technology, Wuxi, China

#### Yang Zhang

Petroleum Engineering School, Southwest Petroleum University, Chengdu, China

#### Professor Daolun Li

Department of Mathematics, Hefei University of Technology, Hefei, China

#### Vigneswaran Rajendran

Department of Mechanical Engineering, Sri Sai Ram Institute of Technology, Chennai, India

#### Sreenivasa Rao Gajula

Department of Chemical-Catalysis, SABIC Research & Technology Center, SRTPL Ltd, Bangalore, India

#### Vadim Akhmetgareev

Terra Laboratories, Golden, United States

#### Mohammed Zeinalabideen

Department of Petroleum Engineering, University of Kirkuk, Kirkuk, Iraq

#### Mayur Pal

Department of Mathematical Modelling, Kaunas Technological University, KTU Lithuania, Kaunas, Lithuania

#### Daowei Gao

School of Chemistry and Chemical Engineering, University of Jinan, Jinan, China

#### Xuxu Sun

School of Safety Science and Emergency Management, Wuhan University of Technology, Wuhan, China

#### Guangjian Dong

Department of Petroleum Engineering, Southwest Petroleum University, Chengdu, China

#### Xiang Zhou

Petroleum Engineering School, Southwest Petroleum University, Chengdu, China

#### Ioana Stanciu

Department of Physical Chemistry, University of Bucharest, Ploiesti, Romania

#### Prathibha Pillai

Department of Petroleum Engineering & Earth Sciences, UPES University, Dehradun, India

#### Narendra Kumar Rawat

Department of Mining and Petroleum, University of São Paulo, São Paulo, Brazil

#### Shailesh N. Gadhvi

Petroleum Laboratory, Dr. K.N. Modi University, Jaipur, India

#### Ebrahim Sfidari

Petroleum Geology Research Group, Research Institute of Applied Sciences, Tehran, Iran

#### Tatal AL-Bazali

Department of Petroleum Engineering, Kuwait University, Safat, Kuwait

#### Hongwen Luo

State Key Laboratory of Oil and Gas Reservoir Geology and Exploitation, Southwest Petroleum University, Chengdu, China

#### Onur Eser KÖK

Department of Petroleum and Natural Gas Engineering, Iskenderun Technical University, Iskenderun, Turkey

#### Hicham Ferrouddji

Faculty of Hydrocarbons and Chemistry, University of Boumerdes, Boumerdes, Algeria

#### Yasir Bashir

School of Physics, Geophysics Section, University of Science, Malaysia, George Town, Malaysia

#### Yongsheng Liu

Department of Engineering and Technology, China University of Geosciences-Beijing, Beijing, China

#### Manoj Tripathi

Department of Physics and Materials Science and Engineering, Jaypee Institute of Information Technology, Noida, India

#### Mohamed Khodja

Algerian Petroleum Institute, Sonatrach, Boumerdes, Algeria

#### Professor Guskova Irina

Department of Development and Operation of Oil Fields, Almetevsk State Oil Institute, Almetevsk, Russian Federation

#### Anireju Dudun

Department of Petroleum Engineering, University of Louisiana at Lafayette, Lafayette, United States

#### Yongping Yu

College of Construction Engineering, Jilin University, Changchun, China

#### Mingchuan Li

School of Petroleum Engineering, China University of Petroleum, Qingdao, China

#### Seyed kourosh Mahjour

Department of Mechanical, Campinas University, Campinas, Brazil

#### Xiang Chen

Petroleum Engineering School, Southwest Petroleum University, Chengdu, China

#### Mohiedin Bagheri Hariri

Institute for Corrosion and Multiphase flow Technology, Department of Chemical and Biomedical Engineering, Ohio University, Athens, United States

#### Upendra Yadav

Department of Petroleum Engineering & Earth Sciences, University of Petroleum & Energy Studies, Dehradun, India

#### Onuoha Fidelis Wopara

Department of Petroleum Engineering, Rivers State University, Port Harcourt, Nigeria

#### Toyin Odutola

Department of Petroleum and Gas Engineering, University of Port Harcourt, Port Harcourt, Nigeria

All members of the Editorial Board have identified their affiliated institutions or organizations, along with the corresponding country or geographic region. SciencePG remains neutral with regard to any jurisdictional claims.

#### PUBLICATION SERVICES

[Journals](#)  
[Special Issues](#)  
[Conferences](#)  
[Books](#)  
[Copyright](#)

#### JOIN US

[Join as an Editor-in-Chief](#)  
[Join as an Editorial Member](#)  
[Become a Reviewer](#)  
[Qualification & Requirement](#)  
[Benefits & Responsibilities](#)

#### RESOURCES

[Open Access](#)  
[For Authors](#)  
[For Librarians](#)  
[For Booksellers](#)  
[Article Processing Charges](#)

#### SPECIAL SERVICES

[Download Certificates](#)  
[Recommend to Library](#)  
[Ordering from SciencePG](#)  
[Subscribe](#)

#### ADDRESS

Science Publishing Group  
 1 Rockefeller Plaza,  
 10th and 11th Floors,  
 New York, NY 10020  
 U.S.A.  
 Tel: (001)347-983-5186



FOLLOW SciencePG



[Sitemap](#) | [Terms & Conditions](#) | [Privacy Policy](#) | [Feedback](#) | [Services](#) | [Contact Us](#)

Copyright © 2012 -- 2022 Science Publishing Group – All rights reserved. Use of this Web site signifies your agreement to the terms and conditions.



# 10th Anniversary of Science Publishing Group

Username	<input type="text"/>	Login
Password	<input type="password"/>	Register

- Home
- Journals
- Special Issues
- Books
- Submission
- Services
- Contact Us
- 10th Anniversary

Article Title

## Petroleum Science and Engineering

Home | Archive | Special Issues | Indexing | Editorial Board | **Reviewers** | Submission Guidelines | Article Processing Charges | Publication Ethics | Copyright | FAQ

Home / Journals / Earth, Energy & Environment / Petroleum Science and Engineering / Reviewers

### Reviewers

**Youcef Khetib**

Department of Petroleum Engineering, University of North Dakota, Grand Forks, United States

**Khawaja Hasnain Iltaf**

Department of Earth and Environmental Sciences, University of Texas Arlington, Arlington, United States

**Chengjin Zhao**

School of Geoscience, China University of Petroleum (Huadong), Qingdao, China

**Rohit kumar Saw**

Department of Petroleum Engineering, Indian Institute of Technology- Indian School of Mines, Dhanbad, India

**Rui Li**

Petrochina Pipeline Company, Langfang, China

**Yong Cui**

Beijing KaiBiao Technology Development Co., Ltd., Beijing, China

**Nabil Abaab**

Department of Geosciences, Le Mans University, Le Mans, France

**Rizwan Muneer**

Department of Petroleum Engineering, Nazarbayev University, Astana, Kazakhstan

**Nuhu Ayuba**

Department of Chemical Engineering, UFSCar - Federal University of São Carlos, São Paulo, Brazil

**Vishal Vasistha**

Department of Mechanical Engineering, IIMT College of Engineering, Greater Noida, India

**Youcheng Liu**

Department of Engineering and Technology, Great Wall Drilling Company, Beijing, China

**Mahnaz Mahdavi Shahri**

Department of Chemistry, Shiraz Branch, Islamic Azad University, Shiraz, Iran

**Yaxin Liu**

Tulsa University Drilling Research Project, The University of Tulsa, Tulsa, United States

**Jonathan Ataquaye Quaye**

School of Energy Resources, China University of Geosciences, Beijing, China

**Zhonghua Liu**

Chongqing University of Science and Technology, Chongqing, China

**Faisal Sorour**

Department of Chemical Engineering, Canal Higher Institute for Engineering and Technology, Cairo, Egypt

**Nsidibe Sunday**

Petroleum / Mechanical Engineering, INSA Centre Val de Loire(INSA CVL), Bourges , France

**Professor Bakhshillo Akramov**

Department of development of oil, gas and gas condensate fields, Russian University of Oil and Gas named after I.M. Gubkin in Tashkent, Tashkent, Uzbekistan

**Peer Reviewers Acknowledgment**

Peer reviewers are key to advancing scholarship and contributing to the quality of scholarly journals. We would like to thank all reviewers who have taken part in the peer-review process for Petroleum Science and Engineering.

**Join as Reviewers**

**Xin Chen**  
Institution of Mining and Petroleum Engineering, University of Alberta, Edmonton, Canada

**Qianli Ma**  
School of Petroleum and Natural Gas Engineering, Changzhou University, Changzhou, China

**Xin Li**  
School of Petroleum Engineering, Southwest Petroleum University, Chengdu, China

**Caspar Adenutsi**  
Department of Petroleum Engineering, Kwame Nkrumah University of Science and Technology, Kumasi, Ghana

**Rasha Hosny**  
Production Department, EOR Lab, Egyptian Petroleum Research Institute, Cairo, Egypt

**Mohammad Javad Sarbaz Hosseini**  
Mapna Drilling Company, Tehran, Iran

All Reviewers have identified their affiliated institutions or organizations, along with the corresponding country or geographic region. SciencePG remains neutral with regard to any jurisdictional claims.

<b>PUBLICATION SERVICES</b> Journals Special Issues Conferences Books Copyright	<b>JOIN US</b> Join as an Editor-in-Chief Join as an Editorial Member Become a Reviewer Qualification & Requirement Benefits & Responsibilities	<b>RESOURCES</b> Open Access For Authors For Librarians For Booksellers Article Processing Charges	<b>SPECIAL SERVICES</b> Download Certificates Recommend to Library Ordering from SciencePG Subscribe	<b>ADDRESS</b> Science Publishing Group 1 Rockefeller Plaza, 10th and 11th Floors, New York, NY 10020 U.S.A. Tel: (001)347-983-8186
--	--	---	--	---

FOLLOW SciencePG





# The Effects Between Interfacial Tension and Viscosity Reduction in Viscous Crude Oil Through the Addition of Surfactant Sodium Lignosulfonate (SLS) for EOR Purpose

Harry Budiharjo Sulistyarso<sup>1</sup>, Joko Pamungkas<sup>1</sup>, Yulius Dedy Hermawan<sup>2</sup>

<sup>1</sup>Department of Petroleum Engineering, Faculty of Mineral Technology, UPN "Veteran", Yogyakarta, Indonesia

<sup>2</sup>Department of Chemical Engineering, Faculty of Industrial and Technology, UPN "Veteran", Yogyakarta, Indonesia

## Email address:

harry\_hb@upnyk.ac.id (Harry Budiharjo Sulistyarso)

## To cite this article:

Harry Budiharjo Sulistyarso, Joko Pamungkas, Yulius Dedy Hermawan. The Effects Between Interfacial Tension and Viscosity Reduction in Viscous Crude Oil Through the Addition of Surfactant Sodium Lignosulfonate (SLS) for EOR Purpose. *Petroleum Science and Engineering*. Vol. 6, No. 2, 2022, pp. 59-64. doi: 10.11648/j.pse.20220602.13

**Received:** October 19, 2022; **Accepted:** November 10, 2022; **Published:** November 23, 2022

---

**Abstract:** Surfactant injection is one of Chemical EOR methods by injecting a special substance as a surface-active agent (surfactant). The purpose is to reduce the interfacial tension (IFT) and the viscosity value of crude oil. This research was conducted to analyze the effect of adding anionic surfactant sodium lignosulfonate (SLS) on a laboratory scale. The sample of crude oil samples are obtained from Wonocolo field, Indonesia. The surfactant was obtained by almond peel extraction, developed at Laboratory Research EOR University of Pembangunan National "Veteran" Yogyakarta. SLS compositions for the experiment are 2%, 4%, 6% and 8% v/v. The test was made at 30, 40, 50, 60 and 70°C. The results showed that 6% v/v SLS solution was the best composition to significantly reduce IFT at 70°C from 32.78 mN/m to 3.22 mN/m. This composition also being the value of critical micelle concentration (CMC) for SLS. At above critical micelle concentration, the additional of surfactants will be insignificant on IFT reduction and also excess amount of surfactant in aqueous solution. With SLS 8% v/v solution gain the lowest viscosity of the fluid from 2.54 cP to 1.88 cP. In addition, the results of this study showed that when the reduction in IFT was the highest, the viscosity reduction was the highest.

**Keywords:** Crude Oil, Enhanced Oil Recovery, Interfacial Tension, Surfactant SLS, Viscosity

---

## 1. Introduction

In 2040 predicted that energy demand in the world is increasing up to 30% from 2010 [1]. With the depletion of petroleum reserves, increasing demand for energy, high population growth, and rapid industrial development, the increase in oil recovery is the most important [2]. In the primary phase, continuous oil drain will cause a decrease in the pressure gradient in the reservoir, and consequently, the oil production rate will decrease, according to Darcy's Law [3]. One of the ways to increase the oil production rate is by reducing the wellbore pressure (BHP). Next, the secondary phase is enforced to boost crude oil out of the reservoir using the pressure maintenance method of water flooding and gas injection [4]. However, waterflooding cannot drain all the oil in the reservoir due to two factors; first, due to reservoir heterogeneity, which causes water to flow in high-

permeability rock paths found between injection wells and production wells. Second, the residual oil is covered by water and entrapped in slight crevices of the rock matrix because the oil-water surface tension stems from the oil flowing [5].

After the primary and secondary phases in the drain of oil, there is still oil that remains not drained. Then, it requires a tertiary phase well known as EOR to increase oil drain in the reservoir for oil displacement efficiency either microscopic or macroscopic scale. Surfactant is one of the components in a chemical injection that is effective to be applied to reduce the value of interfacial tension (IFT) and reduce oil viscosity so that it can increase sweep efficiency and thrust, along with a decrease in residual oil saturation value [5]. Then, it can be used to form a stable oil-in-water emulsion and reduce the viscosity of viscous crude oil.

Chemical injection is one of the advanced oil recovery (EOR) methods using chemicals as an injection fluid. This injection aims to increase the effectiveness of the water injected into the reservoir draining the oil. Chemical injection methods are polymer injection, surfactant injection, and alkali injection. Surfactant injection is a chemical injection by injecting a special chemical substance as a surface-active

agent (Surfactant). The main purpose of being injected with these substances has two main reservoir mechanisms [6]. The first is the reduction in the value of the interfacial tension (IFT), and the second is the wettability alteration (wet change). As a result, there will be an increase in the value of oil recovery.

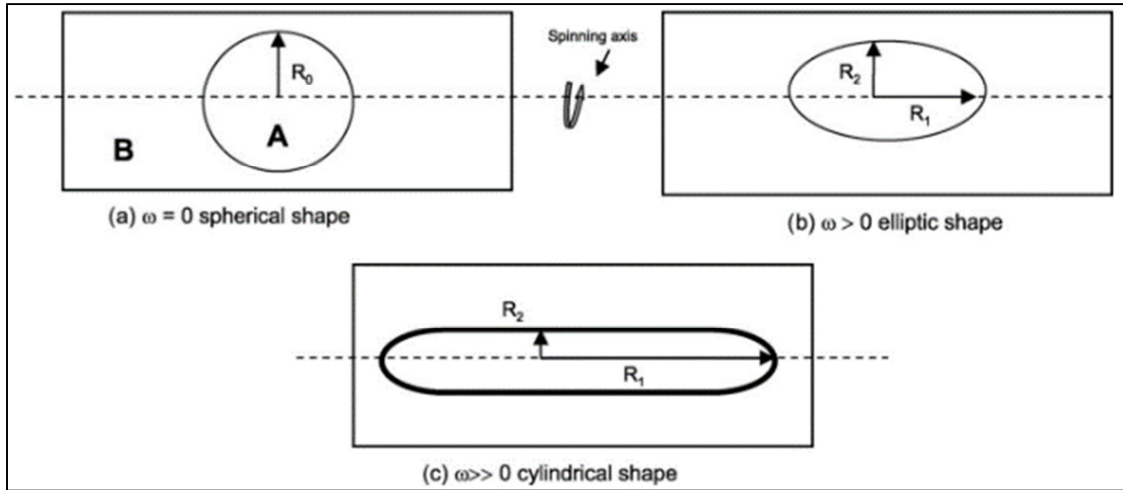


Figure 1. Bubble Shape of IFT Measurement [7].

In that solution, dissolved surfactant molecules were dispersed on the interface. At this moment, surfactants become monomers while decreasing the surface free energy. The addition of surfactant concentration will reach a critical micelle concentration (CMC) value, and then surfactant starts forming micelles. With a higher concentration above CMC, the surfactant will be negligible to IFT reduction. Anionic surfactants such as sodium lignosulfonate (SLS) are well known to decrease the oil-water IFT [8].

The higher viscosity and poor fluidity are the most challenging parameters when developing and applying crude oil production [9]. Reducing crude oil viscosity in the reservoir has always been vital in oil field development. Surfactants form a stable oil-water emulsion and reduce the viscosity of crude oil [10]. Applying surfactant needs the right choice to determine the viscosity reduction effect. Sodium lignosulfonate (SLS) was investigated as a cheap natural surfactant in stabilizing water emulsion in the fluid to reduce the value of IFT. Anionic surfactant has high sensitivity through water salinity with high surfactant concentration. It has been found that the dynamic shear viscosity of the crude oil decreases substantially when it is emulsified with water in the form of an oil-in-water type of emulsion that stabilized by SLS [11].

This research analyzed the effect of adding natural surfactant sodium lignosulfonate (SLS) to crude oil. Therefore, this aims to examine the relation between IFT and fluid viscosity. The procedure is conducting surfactant system tests on SLS, determining the optimum concentration of SLS for the EOR purpose.

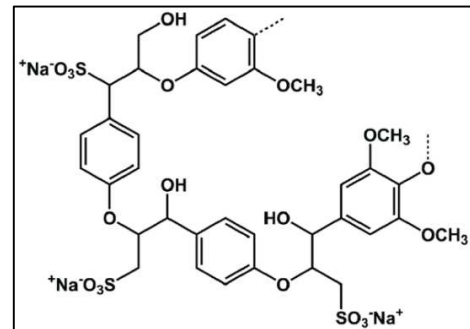


Figure 2. Structure of Sodium Lignosulfonate (SLS) [12].

## 2. Material and Methods

### 2.1. Chemical Sample

The crude oil sample used is from the oilfield in Wonocolo field, Cepu, Middle of Java, Indonesia with a density of 0.903 gr/cc. SLS is obtained from Laboratory Research EOR UPN "Veteran" Yogyakarta. Brine is obtained in the exact location as the crude oil with the salinity value is 8014 ppm.

### 2.2. Experimental Procedures and Instruments

A spinning drop tensiometer is set up to run the IFT test as seen in Figure 3. First, measuring density and concentration of the solution were carried out to measure the IFT value. This test aims to determine the effect of the addition of SLS on the oil-water contact in reducing IFT [13]. Lower the IFT concluded in a lower angle from the droplet (see Figure 2.). Procedures to measure the IFT are injecting 2 μL of crude oil

into 2 ml of brine in the tube. Then, set the temperature according to what will be used for measurement. Running the spinning drop tensiometer at 6000 rpm. Finally, The IFT value will appear on the monitor screen.



Figure 3. Spinning Drop Tensiometer.

The viscosity of the fluid is measured with brookfield viscometer (see Figure 4.). The viscosity testing procedure is as follows. First, turn on the water bath to set the temperature at the measurement time. Then, install a spindle to measure the sample's viscosity, insert the sample into the cylindrical tube, and attach it to the viscometer. Ensure the sample height level is under the height limit on the spindle. Next, perform viscosity measurements at several temperatures and input the sample density data measured on the monitor. And choose the start button on the monitor. Finally, the viscosity value will be displayed on the brookfield viscometer screen.



Figure 4. Brookfield Viscometer.

The parameters will be varied according to IFT and viscosity test. First, the surfactant concentrations are prepared at 2%, 4%, 6% and 8% v/v. Second, the salinity is

set at 8014 ppm. Then, the temperature varied at 30°C, 40°C, 50°C, 60°C and 70°C. The operating conditions for this study are shown in Table 1.

Table 1. Operating Conditions of IFT and Viscosity Measurement.

Parameter	Operating Conditions
Surfactant	Sodium Lignosulfonate (SLS)
Concentration (%)	0.0, 2.0, 4.0, 6.0, 8.0 v/v
Oil density	0.903 gr/cc
Brine salinity	8014 ppm
Temperature (°C)	30, 40, 50, 60, 70


### 3. Result and Discussion

Sodium lignosulfonate is used as a type of SLS made from natural chemicals. This SLS is sourced from chemical content in the form of lignin obtained from Ketapang through the EOR research laboratory of UPN "Veteran" Yogyakarta, the lignin content in almond's peel is extracted through the process of extraction, delignification, and sulfonation. In the early stages, the almond is dried for 7-14 days in the sun to reduce the water content in the almond's peel. The almond's peels are ground to a mesh size of 50 into powder, and this process is carried out to create a powder for the lignin content to be extracted. The extraction process uses ethanol and toluene. In the extraction process, the chemical contents that are not needed will be lost and dissolved in the added organic solvent. Furthermore, the delignification and sulfonation processes are carried out with the aim of binding lignin from the extracted powder and converting the lignin into lignosulfonate. The final result is a surfactant solution of sodium lignosulfonate type. Sodium lignosulfonate is a type of SLS made from natural chemicals, namely vegetable ingredients; the advantages of this material are biodegradable, cheap, and environmentally friendly manufacturing process. The content of the developed SLS is shown in the following Table 2.

Table 2. Sodium Lignosulfonate (SLS) Characteristic.

Characteristic	Operating Conditions
Color	Brownish yellow
pH	5
Smell	Acid sulfuric
Solubility in water	Soluble

The steps taken in making surfactant SLS made from almond's peel can be seen in Figure 5. below.

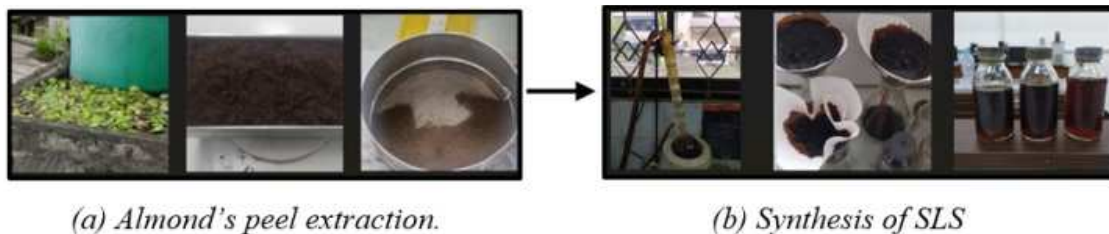

(a) Almond's peel extraction.

(b) Synthesis of SLS

Figure 5. The synthesis process of SLS from almond's peel.





Figure 6. SLS Solubility Test Result.

All SLS concentrations were tested without any formulations in them. Where the concentration of SLS used is 2%, 4%, 6% and 8% v/v. Surfactants with good solubility in brine are needed because the reaction will form a uniform distribution. Hence, the performance of the surfactant will be the same in every part of the rock when it is injected. Based on the solubility test results, SLS dissolved clearly in brine (see Figure 6.).

The IFT test results display that the highest IFT value of the sample crude oil after being added by SLS is found at a temperature of 70°C with a concentration of 2% equal to 25.9 mN/m. Meanwhile, the lowest IFT value was found at a concentration of 6%, which was 3.22 mN/m (Figure 7.).

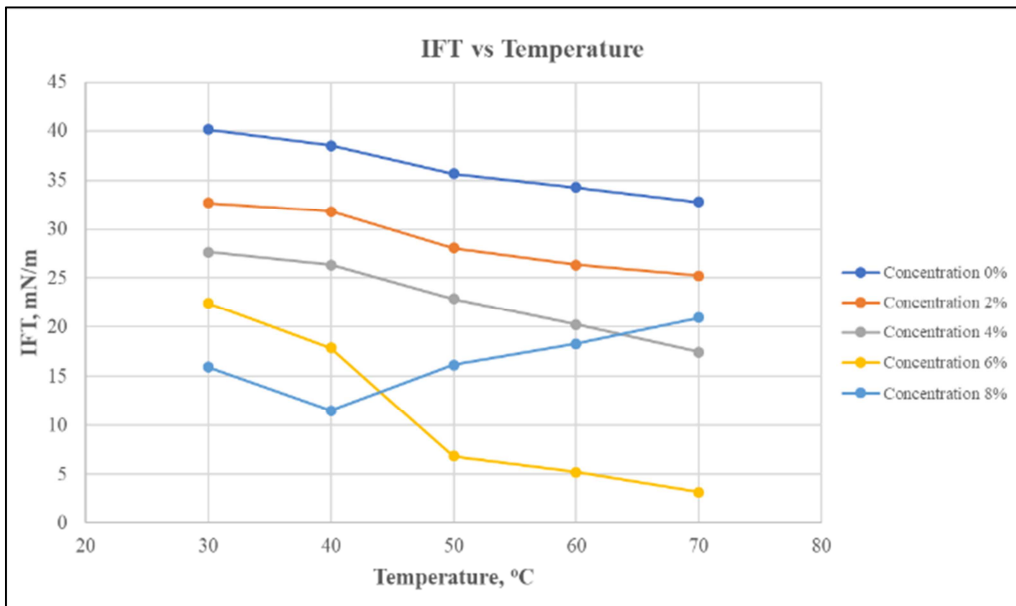


Figure 7. Interfacial Tension (IFT) Test Result.

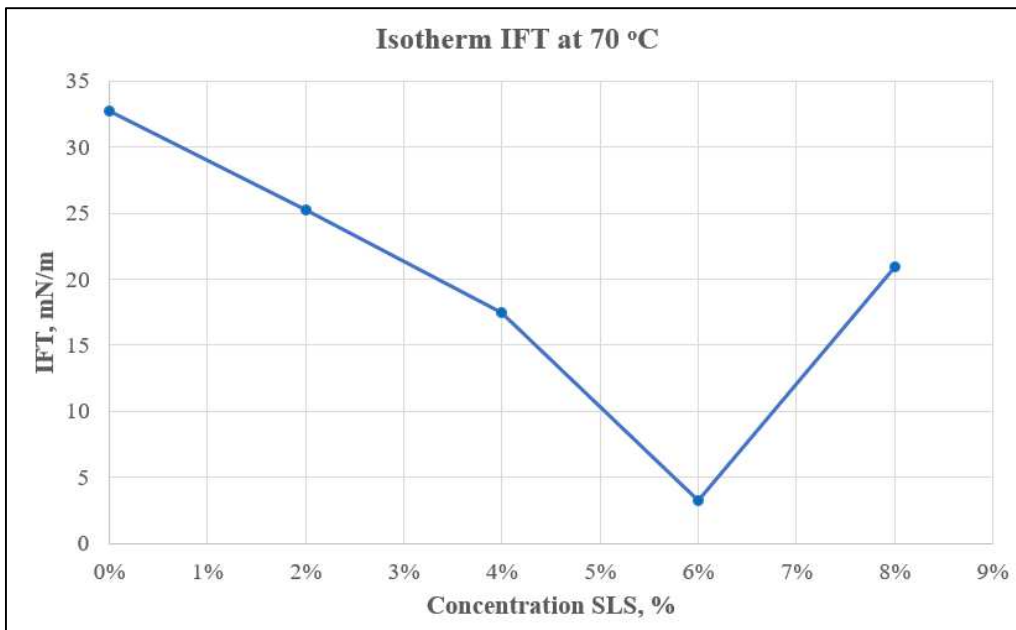


Figure 8. Critical Micelle Concentration (CMC) Test Result.

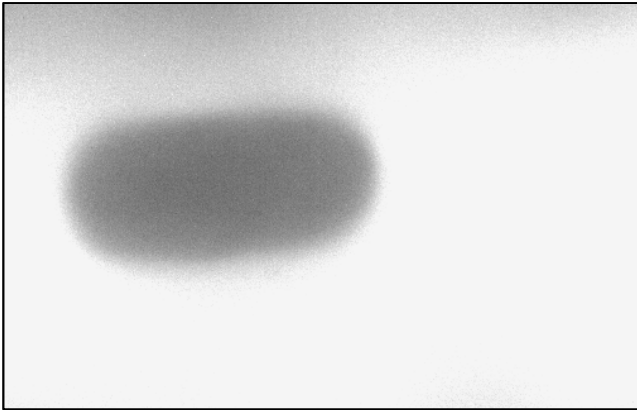


Figure 9. SLS 6% IFT Test Result.

After obtaining IFT prices on various concentrations, the value of critical micelle concentration (CMC) on SLS can be determined as seen in Figure 8. CMC is used to determine the smallest concentration of surfactant in brine as the basis for determining the surfactant concentration to be applied to EOR. Hence, the CMC value was obtained at a concentration of 6%.

Based on Figure 10. Below known that the viscosity of SLS is relatively constant with increasing temperature. Then SLS can reduce the viscosity of the sample crude oil relative to the increase in temperature (see Figure 10.). The lowest viscosity values were located at 8% SLS solution with a temperature of 70°C with the value of 2.54 cP to 1.88. It has shown adding SLS to crude oil can reduce the viscosity value with a constant increase in SLS concentration.

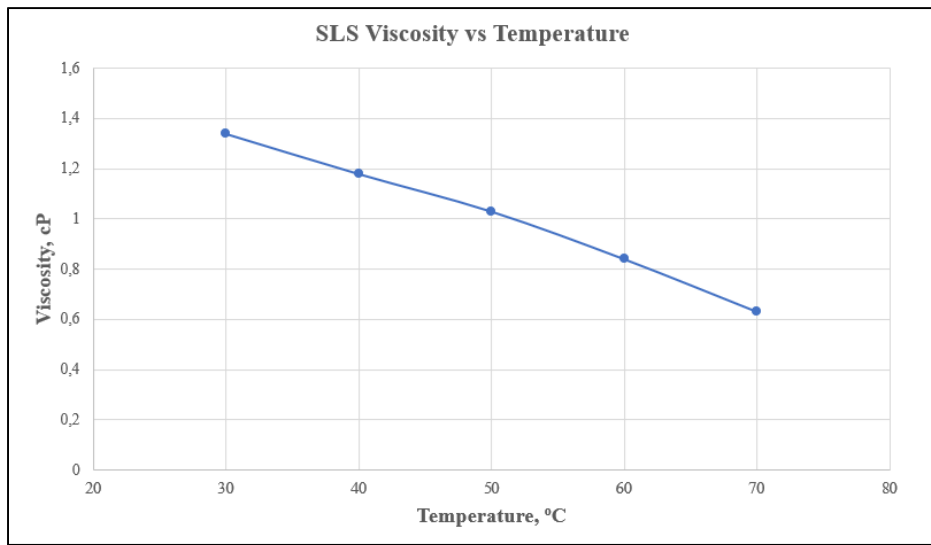


Figure 10. SLS Viscosity Test Result.

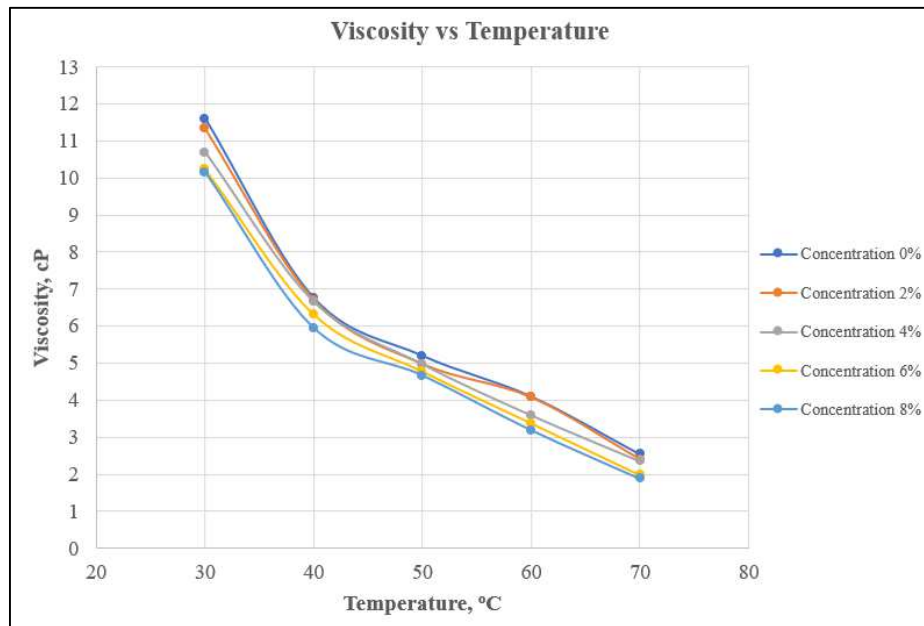


Figure 11. Viscosity Test Result.

Figure 7 shows the IFT variation with temperatures for various systems at the optimized ratio. IFT at the oil-water interface formed by SLS surfactant is in the order of magnitude of  $10^{-0}$  mN/m. When the reduction in IFT was the highest, the viscosity reduction was the highest [14]. The minimum value of IFT of surfactant on the oil-water interface is  $10^{-3}$  mN/m [15]. This study needs development on the formulation of this type of surfactant to gain the minimum value from the criteria of EOR.

## 4. Conclusion

Anionic surfactant sodium lignosulfonate (SLS) based almond peel that is developed from Laboratory Research EOR UPN "Veteran" Yogyakarta able to reduce IFT and viscosity of crude oil significantly. In the solubility test, SLS can be dissolved in water to improve the performance of surfactants during experiments. The most optimal SLS concentration that reduces the viscosity value in the viscosity test is SLS 8% v/v solution to the lowest value from 2.54 cP to 1.88 cP. Hence, SLS can be used to form a stable oil-in-water emulsion and reduce the viscosity of viscous crude oil. In the IFT test, the 6% SLS is optimal because it reduces the lowest IFT to 3.22 mN/m. Besides, after CMC observation at a Temperature 70°C, the optimal CMC is obtained at 6% SLS. This study showed that when the reduction in IFT was the highest, the viscosity reduction was the highest. SLS needs some developments in the formulation to gain the magnitude order in the value of IFT to  $10^{-3}$  mN/m for the EOR process criteria from surfactant injection.

## References

- [1] Karatayev, M., Movkebayeva, G., Bimagambetova, Z., (2019). "In: Mouraviev, N, Koulouri, A. (Eds.), Increasing Utilisation of Renewable Energy Sources: Comparative Analysis of Scenarios Until 2050 BT - Energy Security: Policy Challenges and Solutions for Resource Efficiency". Springer International Publishing, Cham, pp. 57.
- [2] Joshi, S. J., Geetha, S. J., Desai, A. J., (2015). "Characterization and application of bio-surfactant produced by bacillus licheniformis R2". Appl. Biochem. Biotechnol. 177, pp. 351-352.
- [3] Höök, M., Davidsson, S., Johansson, S., Tang, X., (2014). "Decline and depletion rates of oil production: A comprehensive investigation". Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci. 372, 20120448, pp. 4.
- [4] Haq, B., Liu, J., Liu, K., Al Shehri, D., (2020). "The role of biodegradable surfactant in microbial enhanced oil recovery". J. Petrol. Sci. Eng. 189, 106688, pp. 1-2.
- [5] Blunt, M., Fayers, F. J., Orr, F. M., (1993). "Carbon dioxide in enhanced oil recovery". Energy Convers. Manag. 34, pp. 1199-1200.
- [6] Zulkifli, N. N., Mahmood, S. M., Akbari, S., Manap, A. A. A., Kechut, N. I., Elrais, K. A., (2020). "Evaluation of new surfactants for enhanced oil recovery applications in high-temperature reservoirs". J. Pet. Explor. Prod. Technol. 10, pp. 283, 295.
- [7] Viades-Trejo, J., & Gracia-Fadrique, J., (2007). "Spinning drop method. From Young-Laplace to Vonnegut". Colloids and Surfaces A: Physicochemical and Engineering Aspects. 302, pp. 550.
- [8] Sun, N. N., J. Q. Jing, Y. Ding, X. X. Zang, and L. Zou., (2015). "Effects of cationic/anionic electrolytes on the stability of viscous crude oil-in-water emulsions". Chemical Industry and Engineering Progress 34 (8), pp. 3119, 3121-3122.
- [9] Liu, Z., Hedayati, P., Sudhölter, E. J. R., Haaring, R., Shaik, A. R., Kumar, N., (2020). "Adsorption behavior of anionic surfactants to silica surfaces in the presence of calcium ion and polystyrene sulfonate". Colloids Surf. A 602, 125074, pp. 9, 23.
- [10] Hart, A., (2014). "A review of technologies for transporting viscous crude oil and bitumen via pipelines". Journal of Petroleum Exploration and Production Technology 4 (3), pp. 331.
- [11] Zaki. N. N. Ahmed. N. S. & Nassar. A. M., (2000). "Sodium lignin sulfonate to stabilize heavy crude oil-in-water emulsions for pipeline transportation". Petroleum Science and Technology. 18 (9-10), pp. 1179, 1183-1186.
- [12] S. Priyanto et al., (2021). "Synthesis of Sodium Ligno Sulfonate (SLS) Surfactant from Black Liquor Waste and The Potential Test for EOR in Ledok Field Cepu". IOP Conf. Ser. Mater. Sci. Eng., vol. 1053, no. 1, pp. 012075.
- [13] Sulistyarso, H. B., Pamungkas, J., Gusmarwani, S. R., Widyaningsih, I., & Perwira, K. Y., (2021). "Field Test of U-Champ Biosurfactant in Oil Spill Bioremediation". International Journal of Recent Technology and Engineering (IJRTE)". 10 (3), pp 76.
- [14] Liu, M., Wu, Y., Zhang, L., Rong, F., & Yang, Z., (2018). "Mechanism of viscosity reduction in viscous crude oil with polyoxyethylene surfactant compound system". Petroleum Science and Technology, 37 (4), pp. 410.
- [15] M. M. Azis et al., (2021). "Development of ultralow interfacial tension lignosulfonate from kraft black liquor for enhanced oil recovery", J. Eng. Technol. Sci., vol. 53, no. 2, pp. 330, 335.



# 10th Anniversary of Science Publishing Group

Username	<input type="text"/>	Login
Password	<input type="password"/>	Register

- [Home](#)
- [Journals](#)
- [Special Issues](#)
- [Books](#)
- [Submission](#)
- [Services](#)
- [Contact Us](#)
- [10th Anniversary](#)

## Petroleum Science and Engineering

- [Home](#)
- [Archive](#)
- [Special Issues](#)
- [Indexing](#)
- [Editorial Board](#)
- [Reviewers](#)
- [Submission Guidelines](#)
- [Article Processing Charges](#)
- [Publication Ethics](#)
- [Copyright](#)
- [FAQ](#)

### Archive

- 2022, Volume 6 ▶
  - Vol. 6, Issue 2, Dec.
  - Vol. 6, Issue 1, Jun.
- 2021, Volume 5 ▲
- 2020, Volume 4 ▲
- 2019, Volume 3 ▲
- 2018, Volume 2 ▲
- 2017, Volume 1 ▲

[Submit a Manuscript](#)

### Special Issues

- [Coming Special Issues](#)
- [Published Special Issues](#)
- [Propose a Special Issue](#)
- [Special Issue Guidelines](#)

[Join Editorial Board](#)

[Become a Reviewer](#)

[Home](#) / [Journals](#) / [Earth, Energy & Environment](#) / [Petroleum Science and Engineering](#) / [Indexing](#)

## Indexing

*Petroleum Science and Engineering* has been included by the following Abstracting and Indexing databases:

- |   |                             |
|---|-----------------------------|
| <a href="#">CNKI SCHOLAR</a>                      | <a href="#">CrossRef</a>    |
| <a href="#">Eurasian Scientific Journal Index</a> | <a href="#">ResearchBib</a> |
| <a href="#">WorldCat</a>                          |                             |

PUBLICATION SERVICES	JOIN US	RESOURCES	SPECIAL SERVICES	ADDRESS
<ul style="list-style-type: none"> <li><a href="#">Journals</a></li> <li><a href="#">Special Issues</a></li> <li><a href="#">Conferences</a></li> <li><a href="#">Books</a></li> <li><a href="#">Copyright</a></li> </ul>	<ul style="list-style-type: none"> <li><a href="#">Join as an Editor-in-Chief</a></li> <li><a href="#">Join as an Editorial Member</a></li> <li><a href="#">Become a Reviewer</a></li> <li><a href="#">Qualification &amp; Requirement</a></li> <li><a href="#">Benefits &amp; Responsibilities</a></li> </ul>	<ul style="list-style-type: none"> <li><a href="#">Open Access</a></li> <li><a href="#">For Authors</a></li> <li><a href="#">For Librarians</a></li> <li><a href="#">For Booksellers</a></li> <li><a href="#">Article Processing Charges</a></li> </ul>	<ul style="list-style-type: none"> <li><a href="#">Download Certificates</a></li> <li><a href="#">Recommend to Library</a></li> <li><a href="#">Ordering from SciencePG</a></li> <li><a href="#">Subscribe</a></li> </ul>	<p>Science Publishing Group 1 Rockefeller Plaza, 10th and 11th Floors, New York, NY 10020 U.S.A. Tel: (001)347-983-5186</p>

---

FOLLOW SciencePG

- [f](#)
- [t](#)
- [g+](#)
- [in](#)

[Sitemap](#) | [Terms & Conditions](#) | [Privacy Policy](#) | [Feedback](#) | [Services](#) | [Contact Us](#)  
 Copyright © 2012 -- 2022 Science Publishing Group – All rights reserved. Use of this Web site signifies your agreement to the terms and conditions.